

PRODUCT INFORMATION PACKET

marathon®
Motors

Model No: SCA0152A3131GAAD01

Catalog No: SCA0152A3131GAAD01

15kW, General Purpose Low Voltage IEC Motor, 3 phase, 4 Pole, 415V, B5, 50Hz, 90.6%, 160L Frame, TEFC
Cast Iron IE2 Efficiency Motors



Regal and Marathon are trademarks of Regal Beloit Corporation or one of its affiliated companies.
©2020 Regal Beloit Corporation, All Rights Reserved. MC017097E

REGAL


Nameplate Specifications

Output HP	20 Hp	Output KW	15.0 kW
Frequency	50 Hz	Voltage	415 V
Current	27.6 A	Speed	1469 rpm
Service Factor	1	Phase	3
Efficiency	90.6 %	Power Factor	0.84
Duty	S1	Insulation Class	F
Frame	160L	Enclosure	Totally Enclosed Fan Cooled
Ambient Temperature	50 °C	Drive End Bearing Size	6309
Opp Drive End Bearing Size	6209	UL	No
CSA	No	CE	Yes
IP Code	55		

Technical Specifications


Electrical Type	Squirrel Cage	Starting Method	Direct On Line
Poles	4	Rotation	Bi-Directional
Mounting	B35	Motor Orientation	Horizontal
Drive End Bearing	2z-C3	Opp Drive End Bearing	2z-C3
Frame Material	Cast Iron	Shaft Type	Keyed
Overall Length	666 mm	Frame Length	298 mm
Shaft Diameter	42 mm	Shaft Extension	110 mm
Assembly/Box Mounting	TOP		
Outline Drawing	0216000951	Connection Drawing	8442000085

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:16/01/2020

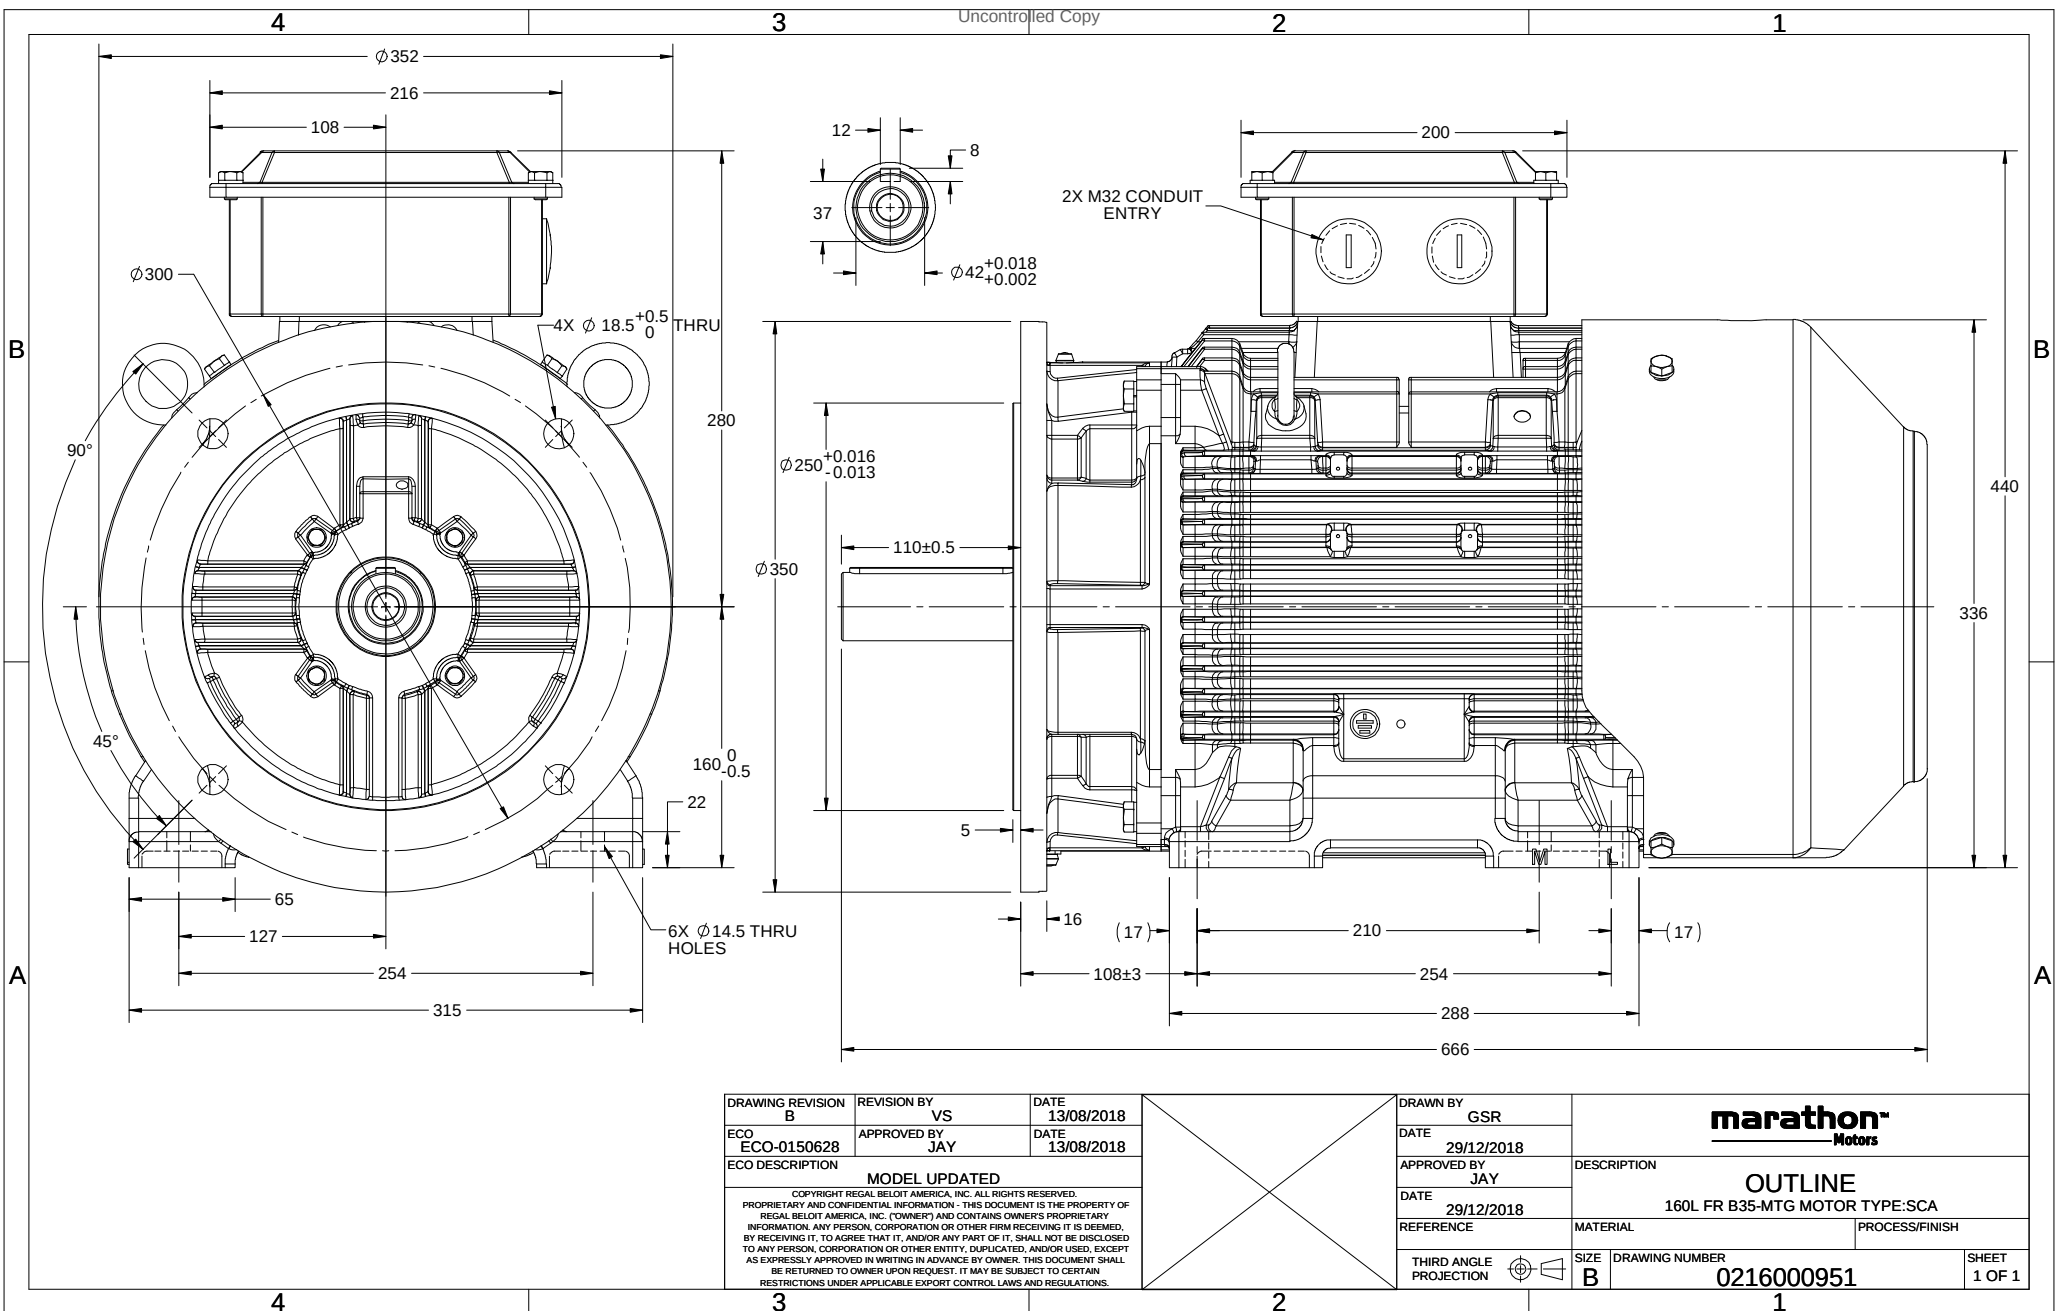

DRAWING REVISION	REVISION BY	DATE
A	SN	13/01/2017
ECO	APPROVED BY	DATE
ECO-0116390	SBD	13/01/2017
ECO DESCRIPTION	NEW DRAWING RELEASE	

GEOMETRIC TOLERANCE		
LINEAR DIM	>0~6	±0.1
	>6~30	±0.2
	>30~120	±0.3

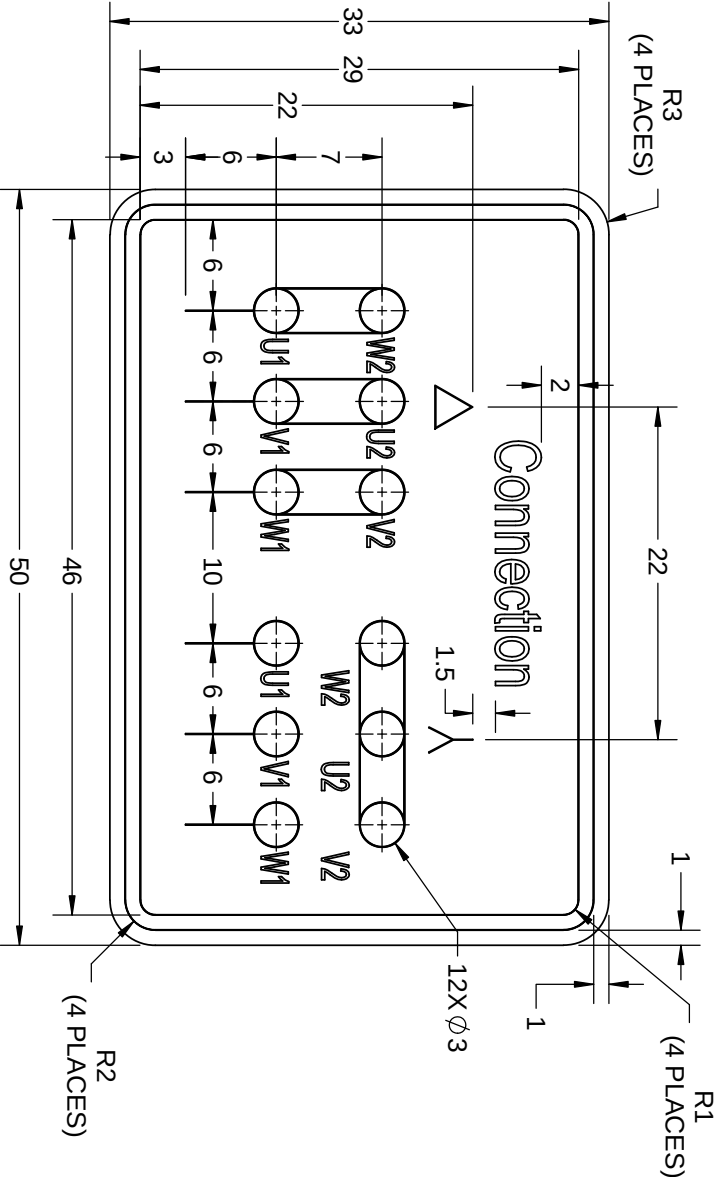

NOTES:

1. PRESSURE-SENSITIVE ADHESIVE COATED PAPER ON THE BACK OF SELF-ADHESIVE.
2. AT THE END OF YELLOW, WORDS, SYMBOLS, LETTERS ARE BLACK, BORDER IS BLACK.
3. THE TOLERANCE OF THE LINEAR SIZE OF THE TOLERANCE WITHOUT THE TOLERANCE BY THE TABLE.

				DRAWN BY		SN	
				DATE		16/12/2016	
				APPROVED BY		SBD	
				DATE		16/12/2016	
				REFERENCE			
				DESCRIPTION			
				CONN DIAGRAM-NAMEPLATE			
MATERIAL		PROCESS/FINISH					
THIRD ANGLE PROJECTION		SIZE	DRAWING NUMBER		SHEET		
		A	8442000085		1 OF 1		

8WD.442.2017

Model No. SCA0152A3131GAAD01

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load				PF at __ load			I _a /I _N [pu]	T _k /T _N [pu]	T _k /T _N [pu]
415	Δ	50	15	20	27.5	1469	98.07	IE2	S/4FL	FL	3/4FL	1/2FL	FL	3/4FL	1/2FL	6.4	2.2	2.9

Motor type	SCA	Degree of protection	IP 55
Enclosure	TEFC	Mounting type	IM B35
Frame Material	Cast Iron	Cooling method	IC 411
Frame size	160L	Motor weight - approx.	168 kg
Duty	S1	Gross weight - approx.	188 kg
Voltage variation *	± 10%	Motor inertia	0.0705 kgm ²
Frequency variation *	± 5%	Load inertia	Customer to Provide
Combined variation *	10%	Vibration level	2.2 mm/s
Design	N	Noise level (1meter distance from motor)	69 dB(A)
Service factor	1.0	No. of starts hot/cold/Equally spread	2/3/4
Insulation class	F	Starting method	DOL
Ambient temperature	-20 to +50 °C	Type of coupling	Direct
Temperature rise (by resistance)	70 [Class B] K	LR withstand time (hot/cold)	10/20 s
Altitude above sea level	1000 meter	Direction of rotation	Bi-directional
Hazardous area classification	NA	Standard rotation	Clockwise form DE
Zone classification	NA	Paint shade	RAL 5014
Gas group	NA	Accessories	
Temperature class	NA	Accessory - 1	-
Rotor type	Aluminum Die cast	Accessory - 2	-
Bearing type	Anti-friction ball	Accessory - 3	-
DE / NDE bearing	6309-2Z / 6209-2Z	Terminal box position	TOP
Lubrication method	Greased for life	Maximum cable size/conduit size	1R x 3C x 35mm ² /2 X M32 x 1.5
Type of grease	NA	Auxiliary terminal box	NA

I_a/I_N - Locked Rotor Current / Rated CurrentT_k/T_N - Breakdown Torque / Rated TorqueT_k/T_N - Locked Rotor Torque / Rated Torque
NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

* Voltage, Frequency and combine variation are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.


Efficiency	Europe	China	India	Aus/Nz	Brazil	Global IEC
Standards	-	-	IS 12615 : 2018	-	-	-

Model No. SCA0152A3131GAAD01

Enclosure	U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [kgm]	T [Nm]	IE Class	Amb [°C]	Duty	Elevation [m]	Inertia [kg·m ²]	Weight [kg]
TEFC	415	Δ	50	15	20	27.5	1469	10.00	98.07	IE2	50	S1	1000	0.0705	168


Motor Load Data

Load Point		NL	1/4FL	1/2FL	3/4FL	FL	5/4FL
Current	A	10.2	11.7	16.9	22.1	27.5	
Torque	Nm	0.0	23.9	48.0	72.3	98.1	
Speed	r/min	1500	1493	1486	1478	1469	
Efficiency	%	0.0	87.6	91.3	90.6	90.6	
Power Factor	%	6.4	50.5	70.0	79.9	83.6	

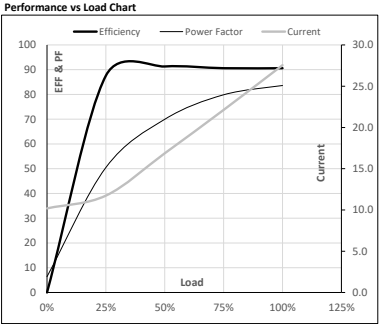

Motor Speed Torque Data

Load Point		LR	P-Up	BD	Rated	NL
Speed	r/min	0	300	1233	1469	1500
Current	A	176.8	159.1	122.1	27.5	10.2
Torque	pu	2.2	1.8	2.9	1	0

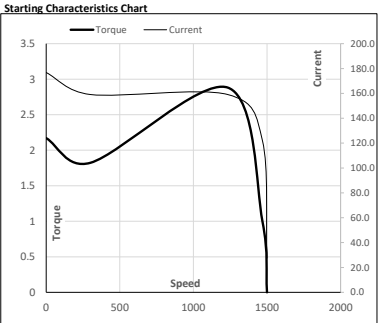


NOTE Refer data sheet for applicable standard and tolerances on performance parameters

Issued By
Issued Date

Model No. SCA0152A3131GAAD01

Enclosure	U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [rpm]	T [kgm]	T [Nm]	IE Class	Amb [°C]	Duty	Elevation [m]	Inertia [kg·m ²]	Weight [kg]
TEFC	415	Δ	50	15	20	27.5	1469	10.00	98.07	IE2	50	S1	1000	0.0705	168

Motor Speed Torque Data								
Load	FL	I ₁	I ₂	I ₃	I ₄	I ₅	LR	
TWT Hot	s 10000	32	21	18	12	11	10	
TWT Cold	s 10000	75	43	40	25	22	20	
Current	pu	1	2	3	4	5	5.5	6.4

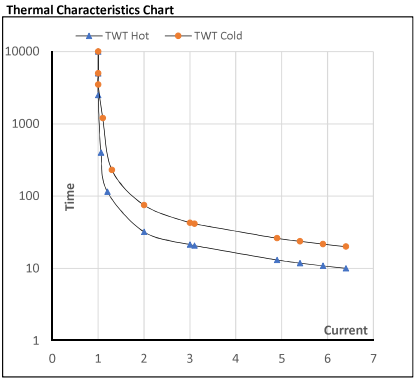

NOTE Refer data sheet for applicable standard and tolerances on performance parameters

Issued By
Issued Date

