

# PRODUCT INFORMATION PACKET

**marathon®**  
Motors

Model No: TCA0031A3111GACD01

Catalog No: TCA0031A3111GACD01

3.0 kW General Purpose Low Voltage IEC Motor, 3 phase, 3000 RPM, 415 V, 100L Frame, TEFC  
Cast Iron IE3 Efficiency Motors



Regal and Marathon are trademarks of Regal Beloit Corporation or one of its affiliated companies.  
©2020 Regal Beloit Corporation, All Rights Reserved. MC017097E

**REGAL**

### Nameplate Specifications

|                            |        |                        |                             |
|----------------------------|--------|------------------------|-----------------------------|
| Output HP                  | 4 Hp   | Output KW              | 3.0 kW                      |
| Frequency                  | 50 Hz  | Voltage                | 415 V                       |
| Current                    | 5.3 A  | Speed                  | 2884 rpm                    |
| Service Factor             | 1      | Phase                  | 3                           |
| Efficiency                 | 87.1 % | Power Factor           | 0.91                        |
| Duty                       | S1     | Insulation Class       | F                           |
| Frame                      | 100L   | Enclosure              | Totally Enclosed Fan Cooled |
| Ambient Temperature        | 50 °C  | Drive End Bearing Size | 6206                        |
| Opp Drive End Bearing Size | 6206   | UL                     | No                          |
| CSA                        | No     | CE                     | Yes                         |
| IP Code                    | 55     |                        |                             |

### Technical Specifications

|                       |               |                       |                |
|-----------------------|---------------|-----------------------|----------------|
| Electrical Type       | Squirrel Cage | Starting Method       | Direct On Line |
| Poles                 | 2             | Rotation              | Bi-Directional |
| Mounting              | B3            | Motor Orientation     | Horizontal     |
| Drive End Bearing     | 2z-C3         | Opp Drive End Bearing | 2z-C3          |
| Frame Material        | Cast Iron     | Shaft Type            | Keyed          |
| Overall Length        | 398 mm        | Frame Length          | 200 mm         |
| Shaft Diameter        | 28 mm         | Shaft Extension       | 60 mm          |
| Assembly/Box Mounting | Top           |                       |                |
| Connection Drawing    | 8442000085    | Outline Drawing       | 0210000271     |

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/01/2020




4

3

Uncontrolled Copy

2

1

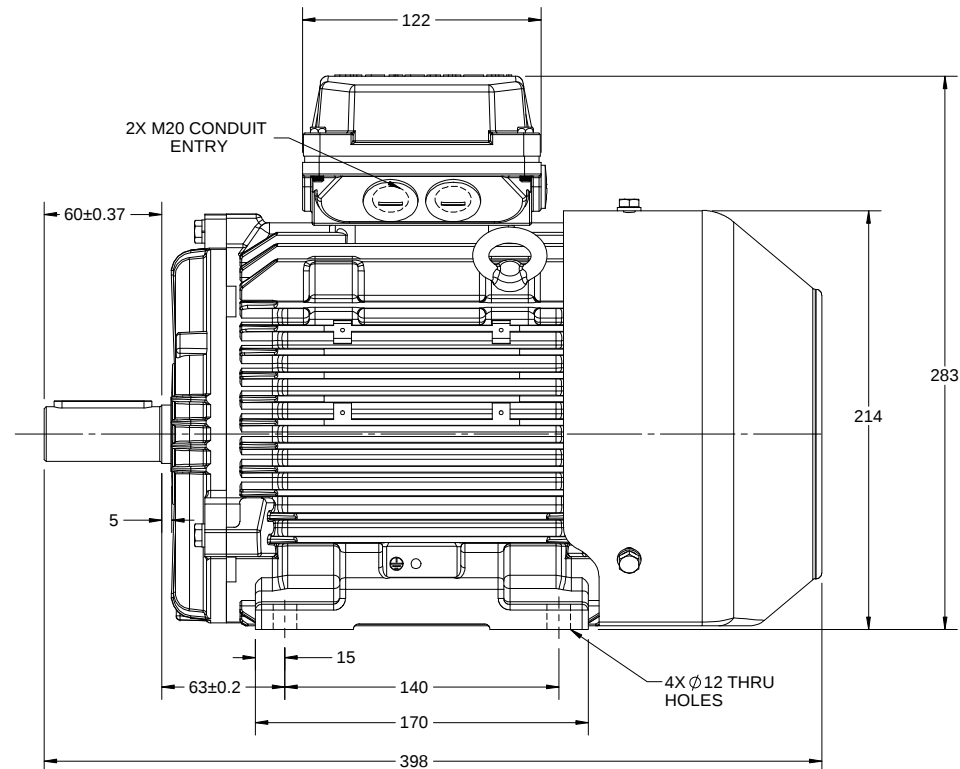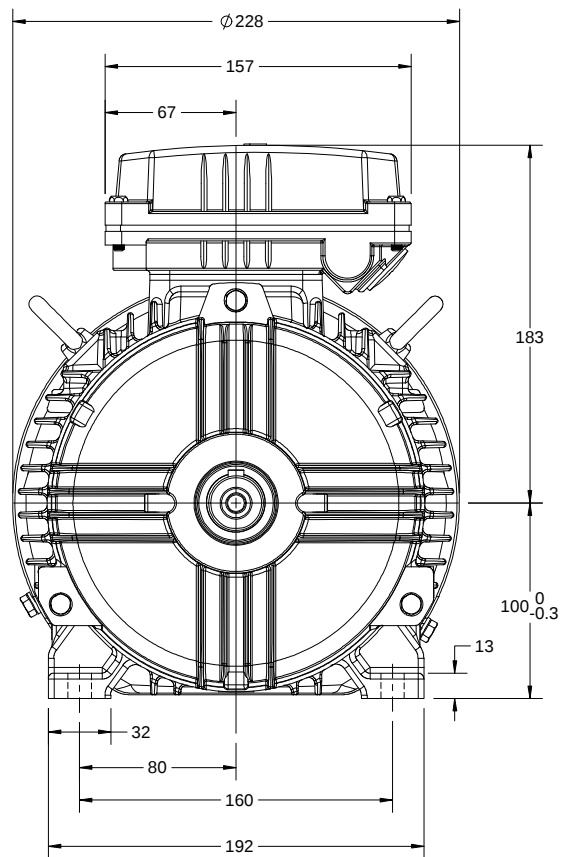


|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                        |                    |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|--------------------|
| DRAWING REVISION<br>D                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | REVISION BY<br>S.MUDDA | DATE<br>22/06/2018 |
| ECO-0147359                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | APPROVED BY<br>JAY     | DATE<br>22/06/2018 |
| ECO DESCRIPTION<br>OUTLINE UPDATED AS PER NEW 3D STRUCTURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                        |                    |
| <small>COPYRIGHT REGAL BELOIT AMERICA, INC. ALL RIGHTS RESERVED.<br/>         PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF<br/>         REGAL BELOIT AMERICA, INC. (OWNER) AND CONTAINS OWNER'S PROPRIETARY<br/>         INFORMATION. ANY PERSON, CORPORATION OR OTHER FIRM RECEIVING IT IS DEEMED,<br/>         BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED<br/>         TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT<br/>         AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL<br/>         BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN<br/>         RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS.</small> |                        |                    |

|                           |                                                                       |                              |
|---------------------------|-----------------------------------------------------------------------|------------------------------|
| DRAWN BY<br>SMAR          |                                                                       |                              |
| DATE<br>01/09/13          |                                                                       |                              |
| APPROVED BY<br>JAY        | DESCRIPTION<br><b>OUTLINE</b><br>100 FR.- B3 MTG. MOTOR TYPE: TCA/QCA |                              |
| DATE<br>01/09/13          |                                                                       |                              |
| REFERENCE                 | MATERIAL                                                              | PROCESS/FINISH               |
| THIRD ANGLE<br>PROJECTION | SIZE<br>B                                                             | DRAWING NUMBER<br>0210000271 |
|                           |                                                                       | SHEET<br>1 OF 1              |

| DRAWING REVISION    | REVISION BY | DATE       |
|---------------------|-------------|------------|
| A                   | SN          | 13/01/2017 |
| ECO-0116390         | APPROVED BY | DATE       |
| ECO DESCRIPTION     | SBD         | 13/01/2017 |
| NEW DRAWING RELEASE |             |            |

| GEOMETRIC TOLERANCE |  |      |
|---------------------|--|------|
| LINEAR DIM          |  |      |
| >0-6                |  | ±0.1 |
| >6-30               |  | ±0.2 |
| >30-120             |  | ±0.3 |

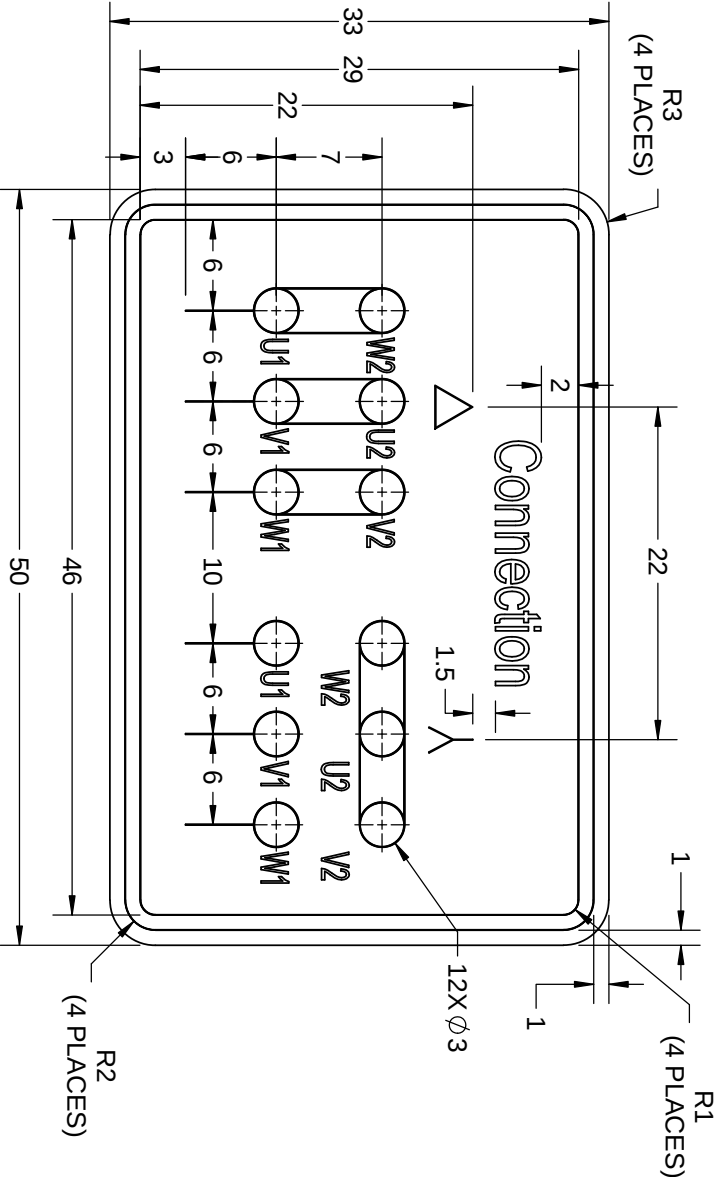

NOTES:

1. PRESSURE-SENSITIVE ADHESIVE COATED PAPER ON THE BACK OF SELF-ADHESIVE.
2. AT THE END OF YELLOW, WORDS, SYMBOLS, LETTERS ARE BLACK, BORDER IS BLACK.
3. THE TOLERANCE OF THE LINEAR SIZE OF THE TOLERANCE WITHOUT THE TOLERANCE BY THE TABLE.

8WD.442.2017

|                        |  |             |                |
|------------------------|--|-------------|----------------|
|                        |  | DRAWN BY    | SN             |
|                        |  | DATE        | 16/12/2016     |
|                        |  | APPROVED BY | SBD            |
|                        |  | DATE        | 16/12/2016     |
| REFERENCE              |  | MATERIAL    |                |
| THIRD ANGLE PROJECTION |  | SIZE        | DRAWING NUMBER |
| A                      |  | 8442000085  | PROCESS/FINISH |
| SHEET                  |  | 1 OF 1      |                |

**REGAL**<sup>TM</sup>  
 Regal Beloit America, Inc.

DESCRIPTION  
CONN DIAGRAM-NAMEPLATE

**Model No.** TCA0031A3111GACD01

| U<br>(V) | Δ / Y<br>Conn | f<br>(Hz) | P<br>[kW] | P<br>[hp] | I<br>[A] | n<br>[RPM] | T<br>[Nm] | IE<br>Class | % EFF at __ load |    |       |       | PF at __ load |       |       | I <sub>a</sub> /I <sub>N</sub><br>[pu] | T <sub>a</sub> /T <sub>N</sub><br>[pu] | T <sub>b</sub> /T <sub>N</sub><br>[pu] |
|----------|---------------|-----------|-----------|-----------|----------|------------|-----------|-------------|------------------|----|-------|-------|---------------|-------|-------|----------------------------------------|----------------------------------------|----------------------------------------|
| 415      | Y             | 50        | 3         | 4.0       | 5.3      | 2884       | 9.88      | IE3         | 5/4FL            | FL | 3/4FL | 1/2FL | FL            | 3/4FL | 1/2FL | 7.7                                    | 3.2                                    | 3.5                                    |
|          |               |           |           |           |          |            |           |             |                  |    |       |       |               |       |       |                                        |                                        |                                        |

|                                  |                            |                                           |                                            |
|----------------------------------|----------------------------|-------------------------------------------|--------------------------------------------|
| Motor type                       | TCA                        | Degree of protection                      | IP 55                                      |
| Enclosure                        | TEFC                       | Mounting type                             | IM B3                                      |
| Frame Material                   | Cast Iron                  | Cooling method                            | IC 411                                     |
| Frame size                       | 100L                       | Motor weight - approx.                    | 39 kg                                      |
| Duty                             | S1                         | Gross weight - approx.                    | 42 kg                                      |
| Voltage variation *              | ± 10%                      | Motor inertia                             | 0.0044 kgm <sup>2</sup>                    |
| Frequency variation *            | ± 5%                       | Load inertia                              | Customer to Provide                        |
| Combined variation *             | 10%                        | Vibration level                           | 1.6 mm/s                                   |
| Design                           | N                          | Noise level ( 1meter distance from motor) | 63 dB(A)                                   |
| Service factor                   | 1.0                        | No. of starts hot/cold/Equally spread     | 2/3/4                                      |
| Insulation class                 | F                          | Starting method                           | DOL                                        |
| Ambient temperature              | -20 to +50 °C              | Type of coupling                          | Direct                                     |
| Temperature rise (by resistance) | 70 [ Class B ] K           | LR withstand time (hot/cold)              | 10/20 s                                    |
| Altitude above sea level         | 1000 meter                 | Direction of rotation                     | Bi-directional                             |
| Hazardous area classification    | NA                         | Standard rotation                         | Clockwise form DE                          |
| Zone classification              | NA                         | Paint shade                               | RAL 5014                                   |
| Gas group                        | NA                         | Accessories                               |                                            |
| Temperature class                | NA                         | Accessory - 1                             | -                                          |
| Rotor type                       | Aluminum Die cast          | Accessory - 2                             | -                                          |
| Bearing type                     | Anti-friction ball bearing | Accessory - 3                             | -                                          |
| DE / NDE bearing                 | 6206-2Z / 6206-2Z          | Terminal box position                     | TOP                                        |
| Lubrication method               | Greased for life           | Maximum cable size/conduit size           | 1R x 3C x 10mm <sup>2</sup> /2 x M20 x 1.5 |
| Type of grease                   | NA                         | Auxiliary terminal box                    | NA                                         |

I<sub>a</sub>/I<sub>N</sub> - Locked Rotor Current / Rated CurrentT<sub>b</sub>/T<sub>N</sub> - Breakdown Torque / Rated TorqueT<sub>a</sub>/T<sub>N</sub> - Locked Rotor Torque / Rated Torque
**NOTE**

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

\* Voltage, Frequency and combine variation are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

| Efficiency Standards | Europe | China | India           | Aus/Nz | Brazil | Global IEC |
|----------------------|--------|-------|-----------------|--------|--------|------------|
|                      | -      | -     | IS 12615 : 2018 | -      | -      | -          |


Model No. TCA0031A3111GACD01

| Enclosure | U   | Δ / Y | f    | P    | P   | I     | n     | T    | T     | IE   | Amb | Duty | Elevation | Inertia              | Weight |
|-----------|-----|-------|------|------|-----|-------|-------|------|-------|------|-----|------|-----------|----------------------|--------|
| (V)       | Com | [Hz]  | [kW] | [hp] | [A] | [RPM] | [kgm] | [Nm] | Class | [°C] | S1  | 1000 | [m]       | [kg·m <sup>2</sup> ] | [kg]   |
| TFC       | 415 | Y     | 50   | 3    | 4.0 | 5.3   | 2884  | 1.01 | 9.88  | IE3  | 50  | S1   | 1000      | 0.0044               | 39     |

Motor Speed Data

| Load Point   | NL    | 1/4FL | 1/2FL | 3/4FL | FL   | 5/4FL |
|--------------|-------|-------|-------|-------|------|-------|
| Current      | A     | 1.8   | 2.2   | 3.0   | 4.1  | 5.3   |
| Torque       | Nm    | 0.0   | 2.4   | 4.8   | 7.3  | 9.9   |
| Speed        | r/min | 3000  | 2972  | 2945  | 2916 | 2884  |
| Efficiency   | %     | 0.0   | 82.0  | 87.0  | 87.1 | 87.1  |
| Power Factor | %     | 10.9  | 57.3  | 77.0  | 87.0 | 91.0  |


Performance vs Load Chart

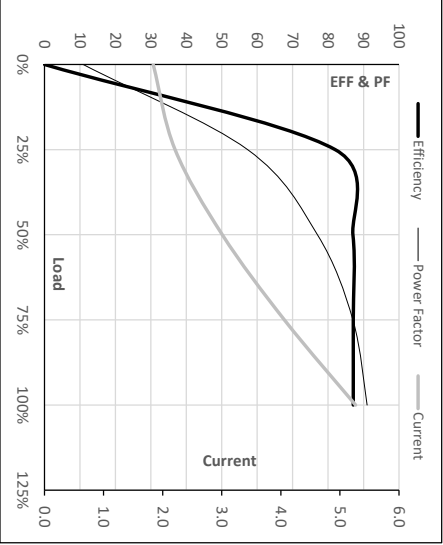

Motor Speed Torque Data

| Load Point | LR    | P-Up | BD   | Rated | NL   |      |
|------------|-------|------|------|-------|------|------|
| Speed      | r/min | 0    | 600  | 2054  | 2884 | 3000 |
| Current    | A     | 40.5 | 36.5 | 25.3  | 5.3  | 1.8  |
| Torque     | pu    | 3.2  | 2.7  | 3.5   | 1    | 0    |

Starting Characteristics Chart

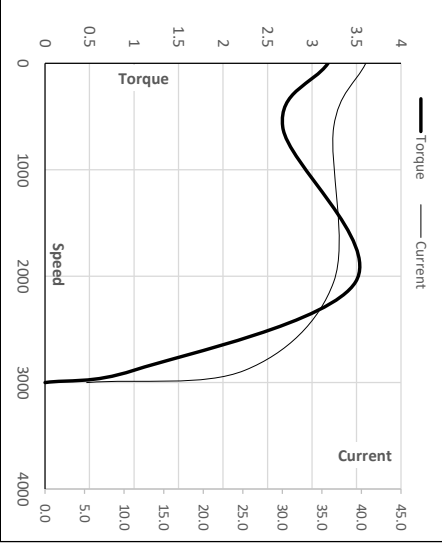

NOTE Refer data sheet for applicable standard and tolerances on performance parameters


Issued By  
Issued Date

**Model No.** TCA0031A3111GACD01

| Enclosure | U<br>(V) | Δ / Y<br>Conn | f<br>[Hz] | P<br>[kW] | P<br>[hp] | I<br>[A] | n<br>[rpm] | T<br>[kgm] | T<br>[Nm] | IE<br>Class | Amb<br>[°C] | Duty | Elevation<br>[m] | Inertia<br>[kg·m <sup>2</sup> ] | Weight<br>[kg] |
|-----------|----------|---------------|-----------|-----------|-----------|----------|------------|------------|-----------|-------------|-------------|------|------------------|---------------------------------|----------------|
| TEFC      | 415      | Y             | 50        | 3         | 4.0       | 5.3      | 2884       | 1.01       | 9.88      | IE3         | 50          | S1   | 1000             | 0.0044                          | 39             |

**Motor Speed Torque Data**

| Load     | FL      | I <sub>1</sub> | I <sub>2</sub> | I <sub>3</sub> | I <sub>4</sub> | I <sub>5</sub> | LR  |
|----------|---------|----------------|----------------|----------------|----------------|----------------|-----|
| TWT Hot  | s 10000 | 39             | 26             | 24             | 20             | 15             | 10  |
| TWT Cold | s 10000 | 80             | 51             | 46             | 32             | 26             | 20  |
| Current  | pu 1    | 2              | 3              | 4              | 5              | 5.5            | 7.7 |

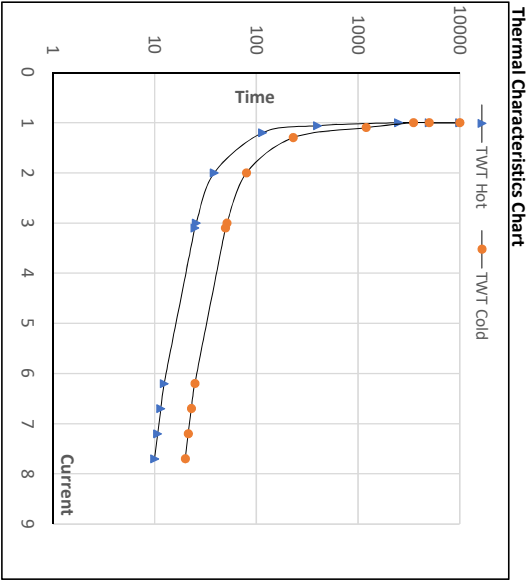

**NOTE** Refer data sheet for applicable standard and tolerances on performance parameters

Issued By  
Issued Date