

PRODUCT INFORMATION PACKET

marathon®
Motors

Model No: SCA0153A3121GAAD01

Catalog No: SCA0153A3121GAAD01

15kW, General Purpose Low Voltage IEC Motor, 3 phase, 6 Pole, 415V, B5, 50Hz, 89.7%, 180L Frame, TEFC
Cast Iron IE2 Efficiency Motors



Regal and Marathon are trademarks of Regal Beloit Corporation or one of its affiliated companies.
©2020 Regal Beloit Corporation, All Rights Reserved. MC017097E

REGAL


Nameplate Specifications

Output HP	20 Hp	Output KW	15.0 kW
Frequency	50 Hz	Voltage	415 V
Current	30.1 A	Speed	977 rpm
Service Factor	1	Phase	3
Efficiency	89.7 %	Power Factor	0.77
Duty	S1	Insulation Class	F
Frame	180L	Enclosure	Totally Enclosed Fan Cooled
Ambient Temperature	50 °C	Drive End Bearing Size	6311
Opp Drive End Bearing Size	6211	UL	No
CSA	No	CE	Yes
IP Code	55		

Technical Specifications

Electrical Type	Squirrel Cage	Starting Method	Direct On Line
Poles	6	Rotation	Bi-Directional
Mounting	B5	Motor Orientation	Horizontal
Drive End Bearing	2z-C3	Opp Drive End Bearing	2z-C3
Frame Material	Cast Iron	Shaft Type	Keyed
Overall Length	750 mm	Frame Length	366 mm
Shaft Diameter	48 mm	Shaft Extension	110 mm
Assembly/Box Mounting	TOP		
Connection Drawing	8442000085	Outline Drawing	0218000835

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:16/01/2020

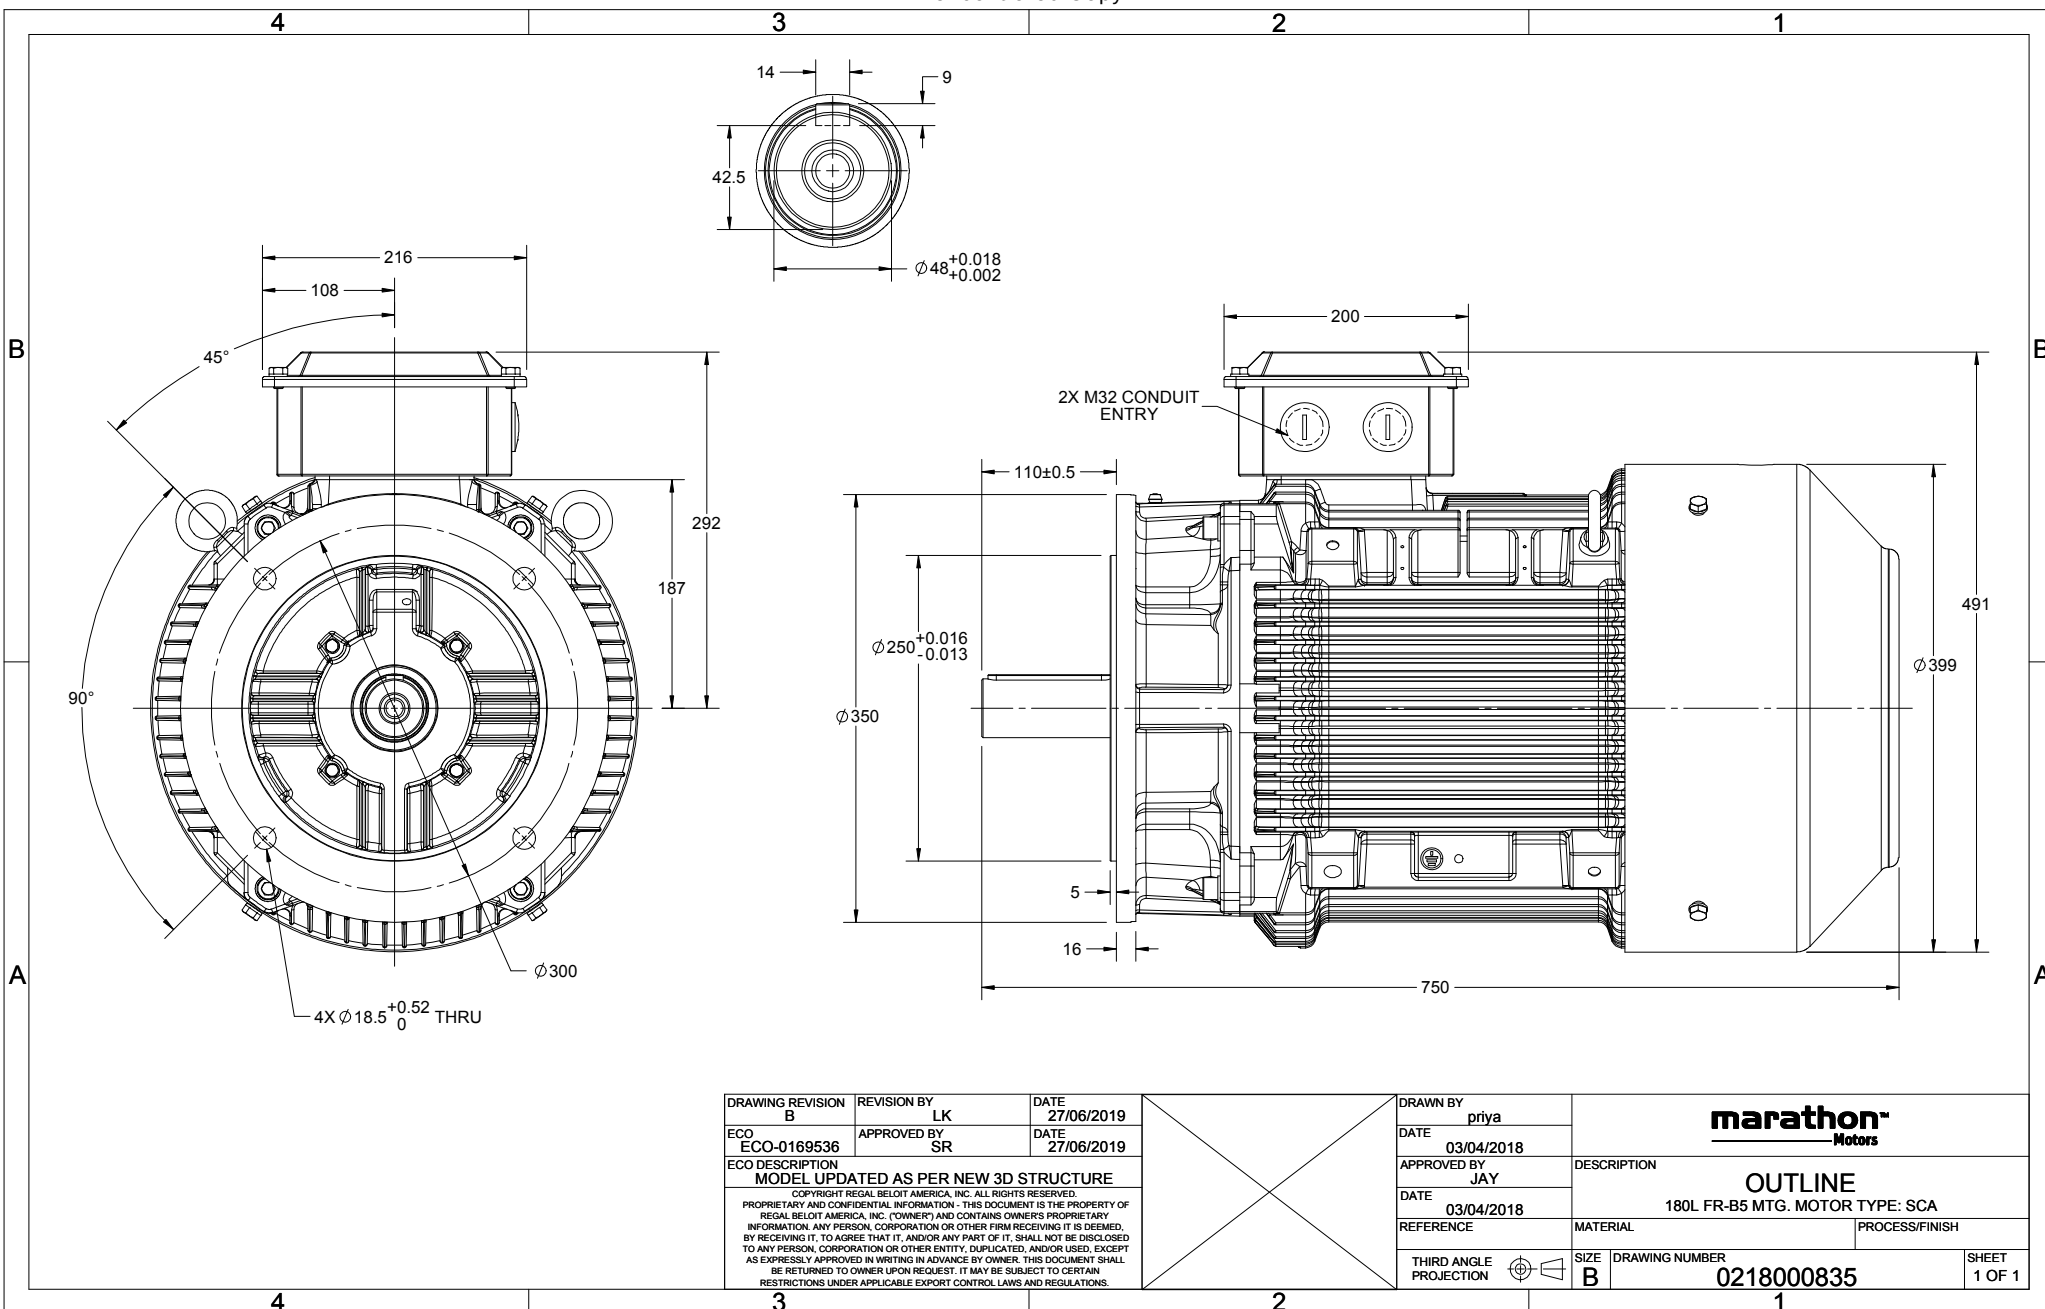


DRAWING REVISION B	REVISION BY LK	DATE 27/06/2019
ECO-0169536	APPROVED BY SR	DATE 27/06/2019
ECO DESCRIPTION MODEL UPDATED AS PER NEW 3D STRUCTURE		
COPYRIGHT REGAL BELOIT AMERICA, INC. ALL RIGHTS RESERVED. PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF REGAL BELOIT AMERICA, INC. (OWNER) AND CONTAINS OWNER'S PROPRIETARY INFORMATION. ANY PERSON, CORPORATION OR OTHER FIRM RECEIVING IT IS DEEMED, BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS.		

DRAWN BY priya		
DATE 03/04/2018		
APPROVED BY JAY	DESCRIPTION OUTLINE 180L FR-B5 MTG. MOTOR TYPE: SCA	
DATE 03/04/2018		
REFERENCE	MATERIAL	PROCESS/FINISH
THIRD ANGLE PROJECTION	SIZE B	DRAWING NUMBER 0218000835
		SHEET 1 OF 1

DRAWING REVISION A		REVISION BY SN	DATE 13/01/2017
ECO ECO-0116390	APPROVED BY SBD	DATE 13/01/2017	
ECO DESCRIPTION			
NEW DRAWING RELEASE			

GEOMETRIC TOLERANCE		
LINEAR DIM		
>0-6		±0.1
>6-30		±0.2
>30-120		±0.3

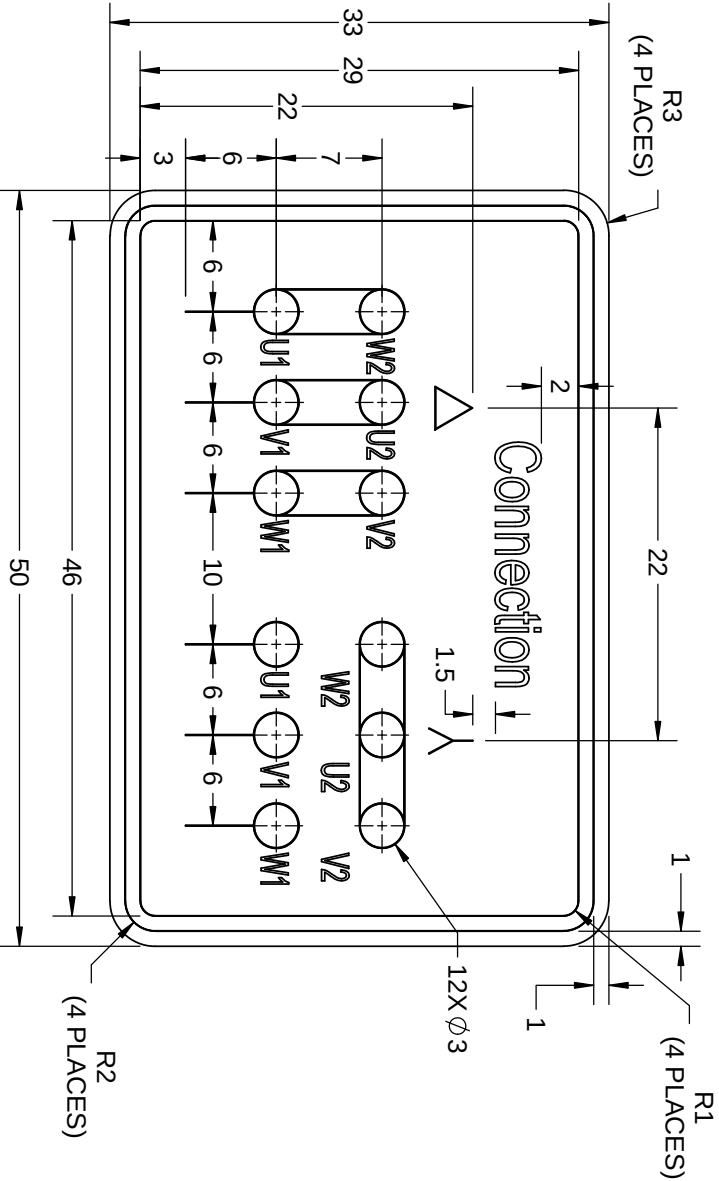

NOTES:

1. PRESSURE-SENSITIVE ADHESIVE COATED PAPER ON THE BACK OF SELF-ADHESIVE.
2. AT THE END OF YELLOW, WORDS, SYMBOLS, LETTERS ARE BLACK, BORDER IS BLACK.
3. THE TOLERANCE OF THE LINEAR SIZE OF THE TOLERANCE WITHOUT THE TOLERANCE BY THE TABLE.

DRAWN BY		SN	Regal Beloit America, Inc.	
DATE		16/12/2016	DESCRIPTION	
APPROVED BY		SBD	CONN DIAGRAM-NAMEPLATE	
DATE		16/12/2016	MATERIAL	
REFERENCE			PROCESS/FINISH	
THIRD ANGLE PROJECTION		A	SIZE	
			DRAWING NUMBER	
			8442000085	
			SHEET	
			1 OF 1	

Model No. SCA0153A3121GAAD01

U [V]	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load				PF at __ load			I _L /I _N [pu]	T _L /T _N [pu]	T _L /T _N [pu]
415	Δ	50	15	20	30.1	977	145.80	IE2	S/4FL	FL	3/4FL	1/2FL	FL	3/4FL	1/2FL	5.4	2.3	2.6

Motor type	SCA	Degree of protection	IP 55
Enclosure	TEFC	Mounting type	IM B5
Frame Material	Cast Iron	Cooling method	IC 411
Frame size	180L	Motor weight - approx.	218 kg
Duty	S1	Gross weight - approx.	238 kg
Voltage variation *	± 10%	Motor inertia	0.2127 kgm ²
Frequency variation *	± 5%	Load inertia	Customer to Provide
Combined variation *	10%	Vibration level	2.2 mm/s
Design	N	Noise level (1meter distance from motor)	69 dB(A)
Service factor	1.0	No. of starts hot/cold/Equally spread	2/3/4
Insulation class	F	Starting method	DOL
Ambient temperature	-20 to +50 °C	Type of coupling	Direct
Temperature rise (by resistance)	70 [Class B] K	LR withstand time (hot/cold)	15/30 s
Altitude above sea level	1000 meter	Direction of rotation	Bi-directional
Hazardous area classification	NA	Standard rotation	Clockwise form DE
Zone classification	NA	Paint shade	RAL 5014
Gas group	NA	Accessories	
Temperature class	NA	Accessory - 1	-
Rotor type	Aluminum Die cast	Accessory - 2	-
Bearing type	Anti-friction ball	Accessory - 3	-
DE / NDE bearing	6311-2Z / 6211-2Z	Terminal box position	TOP
Lubrication method	Greased for life	Maximum cable size/conduit size	1R x 3C x 35mm ² /2 X M32 x 1.5
Type of grease	NA	Auxiliary terminal box	NA

I_L/I_N - Locked Rotor Current / Rated CurrentT_L/T_N - Breakdown Torque / Rated TorqueT_L/T_N - Locked Rotor Torque / Rated Torque
NOTE

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

* Voltage, Frequency and combine variation are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.


Efficiency	Europe	China	India	Aus/Nz	Brazil	Global IEC
Standards	-	-	IS 12615 : 2018	-	-	-

Model No. SCA0153A3121GAAD01

Enclosure	U [V]	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [kgm]	T [Nm]	IE Class	Amb [°C]	Duty	Elevation [m]	Inertia [kg·m ²]	Weight [kg]
TEFC	415	Δ	50	15	20	30.1	977	14.87	145.80	IE2	50	S1	1000	0.2127	218


Motor Load Data

Load Point		NL	1/4FL	1/2FL	3/4FL	FL	5/4FL
Current	A	15.6	16.6	21.5	25.6	30.1	
Torque	Nm	0.0	35.8	72.0	108.7	145.8	
Speed	r/min	1000	995	989	984	977	
Efficiency	%	0.0	83.0	88.8	89.7	89.7	
Power Factor	%	6.4	37.8	56.1	70.1	77.2	

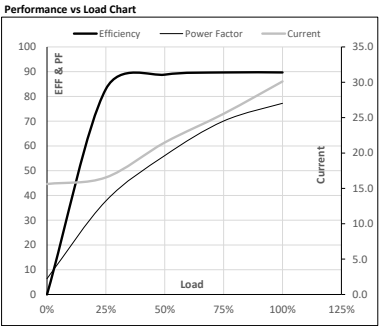

Motor Speed Torque Data

Load Point		LR	P-Up	BD	Rated	NL
Speed	r/min	0	143	865	977	1000
Current	A	162.9	146.6	97.4	30.1	15.6
Torque	pu	2.3	2.0	2.6	1	0

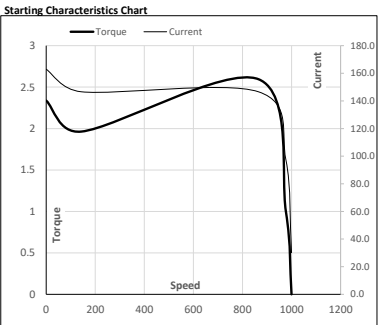

NOTE Refer data sheet for applicable standard and tolerances on performance parameters


Issued By

Issued Date

Model No. SCA0153A3121GAAD01

Enclosure	U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [rpm]	T [kgm]	T [Nm]	IE Class	Amb [°C]	Duty	Elevation [m]	Inertia [kg·m ²]	Weight [kg]
TEFC	415	Δ	50	15	20	30.1	977	14.87	145.80	IE2	50	S1	1000	0.2127	218

Motor Speed Torque Data								
Load	FL	I ₁	I ₂	I ₃	I ₄	I ₅	LR	
TWT Hot	s 10000	41	27	20	17	16	15	
TWT Cold	s 10000	81	54	50	35	32	30	
Current	pu	1	2	3	4	4.5	5	5.4

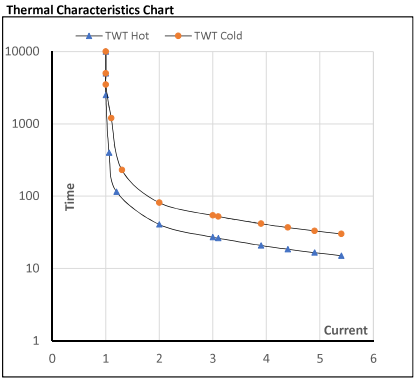

NOTE Refer data sheet for applicable standard and tolerances on performance parameters

Issued By
Issued Date

